

SIROCCO. ELECTRONICS-CO. , LTD


GENERAL PURPOSE PLASTIC RECTIFIER
Reverse Voltage - 200 to 1300 Volts
Forward Current - 3.0 Amperes

BY251 THRU BY255

Features

- Low cost
- Diffused junction
- High current capability
- The plastic material carries U/L recognition 94V-0
- Terminals: Axial leads
- Polarity: Color band denotes cathode

DO-201AD

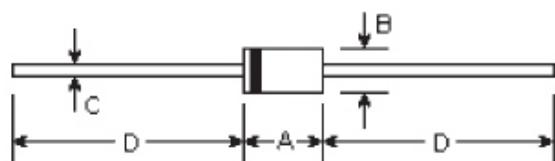

Mounting Instruction

- Min. distance from body to soldering point, 4mm
- Max. solder temperature, 350 °C
- Max. soldering time: 3.5 Sec.
- Do not bend lead at a point closer than 3mm to the body

DIM	DIMENSIONS				Note
	inches		mm		
	Min.	Max.	Min.	Max.	
A	0.283	0.374	7.20	9.50	
B	0.189	0.208	4.80	5.30	Φ
C	0.048	0.051	1.20	1.30	Φ
D	1.000	-	25.40	-	

Maximum Ratings and Electrical Characteristics

	Symbols	BY251	BY252	BY253	BY254	BY255	Units
Peak repetitive reverse voltage	V_{RRM}	200	400	600	800	1300	Volts
Forward current at $T_{amb}=50^{\circ}\text{C}$	$I_{(AV)}$			3.0			Amps
8.3mS peak forward surge current	I_{FSM}			100.0			Amps
Recurrent peak forward current	I_{FRM}			20.0			Amps
Maximum forward voltage drop at $I_F=3.0\text{A}$	V_F			1.1			Volts
Maximum reverse current at V_{RRM}	I_R			10.0			μA
Maximum thermal resistance ($l=10\text{mm}$)	$R_{ct,JA}$			30.0			$^{\circ}\text{C/W}$
Operating and storage temperature range	T_J, T_{sto}			-65 to +150			$^{\circ}\text{C}$

SIROCCO. ELECTRONICS-CO., LTD

RATINGS AND CHARACTERISTIC CURVES

